


### Installation Procedures:



**Step 1:** Remove wheel from car. (Refer to Service Manual on proper wheel removal). Insert adapter into the front side of the wheel

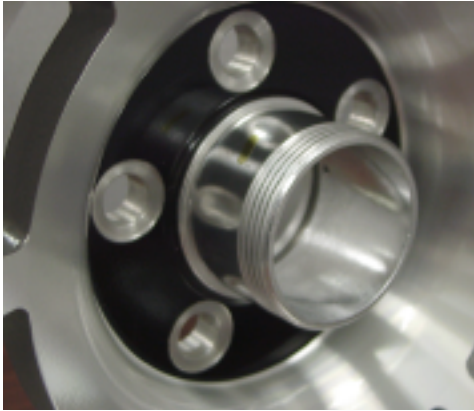


**Step 3:** Thread wheel spinner onto adapter and secure with set screw to the threaded hole on the back side of wheel spinner.

**Step 4:** Install wheel back to car.

**Step 5:** Repeat same procedure on each wheel

**Note:** On some 81/82 models GM used a thicker from hub assembly. It may be necessary to slightly file, or machine inner portion of hub assembly for proper fit.

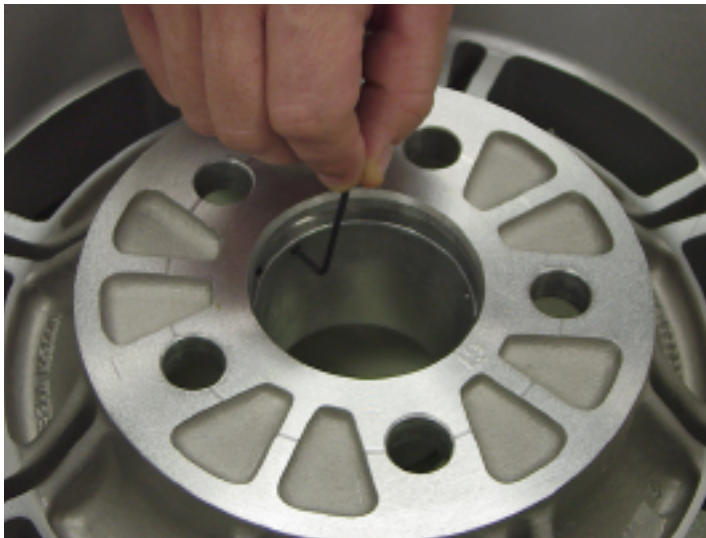

**Step 2:** Insert 3 set screws in the threaded holes on adapter from the back side of the wheel and tighten securely.