


INSTALLATION INSTRUCTIONS PART #'s 35201 / 33790

ECKLER'S[®]
Quality Parts & Accessories for Corvettes



1-800-327-4868

- 1) Remove side terminal cable from vehicle's battery, choosing either POS or NEG side by clearance.
- 2) Install the Battery Disconnect Switch onto the battery's side terminal by inserting the bolt (included) through the non-threaded end of the Disconnect Switch to the battery.
- 3) Reinstall the removed battery cable onto the **THREADED** side of the Disconnect Switch. Position the Disconnect Switch and the battery cable so they do not interfere with the battery compartment door or hood.
- 4) Tighten all connections firmly.

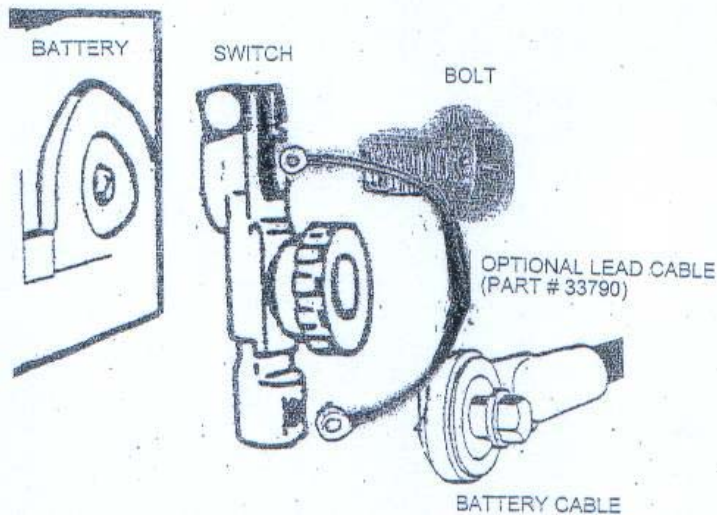

Shown with optional ECM/radio power supply lead part # 33790

Connect one end of the lead to the battery side and the other to the cable side. Do not attempt to start car as this will blow fuse.